


Reference data : The output waveform of CF5037

Saved: 23 OCT 2003 23:12:55

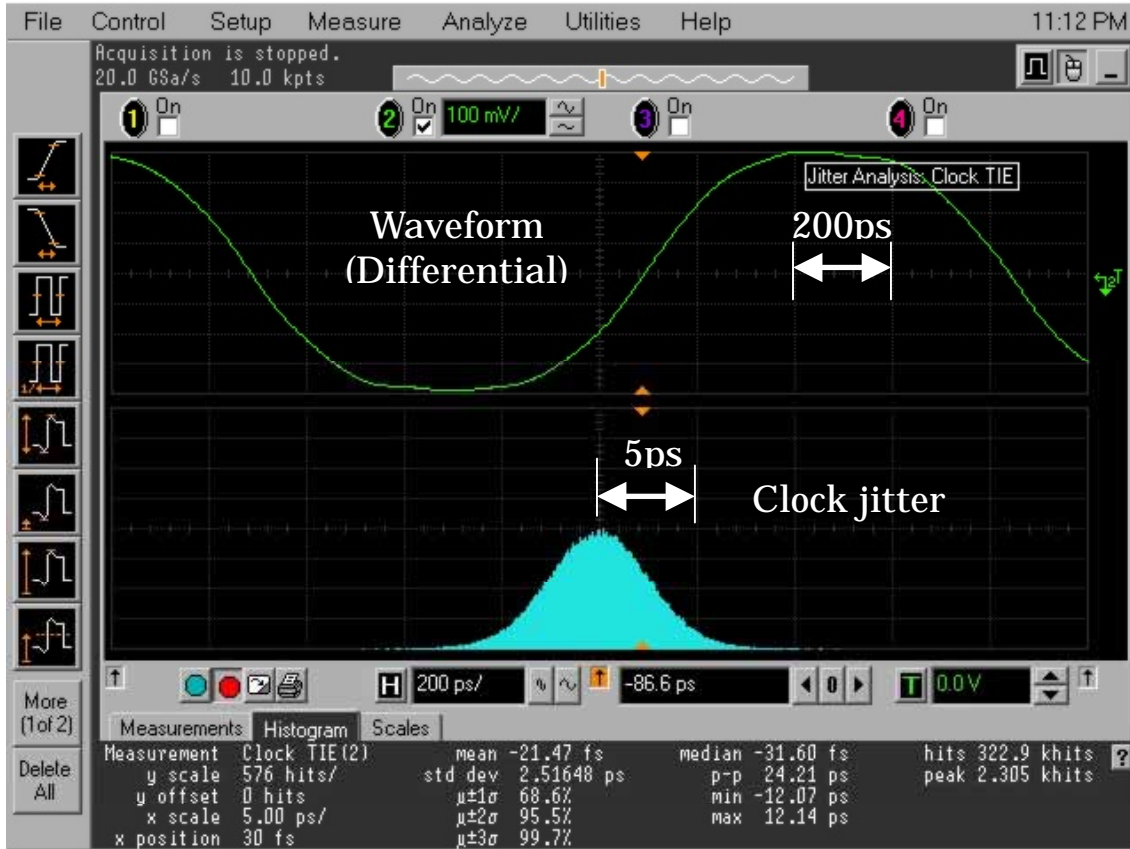

- Measurement conditions

- Power supply voltage** : 2.5V
- Output frequency** : 644MHz(SAW)
- Differential Output Voltage (R=100ohm across OUT and OUTN)**
- Temperature** : 25°C
- Package** : Miniature Ceramic SMD package(7.0mm x 5.0mm)
- Oscilloscopes** : Agilent Infiniium 54855A
- Differential Probe** : Agilent InfiniMax 1134A

- Reference

Clock jitter by TIE^(*) histogram (54855A) : std dev 2.5ps ,p-p 24.2ps

(*1)Time Interval Error